



DCOBRA4806 (4812) -E (SM) -AUX_V4 贴装焊接要求 (增量式与磁编区别)

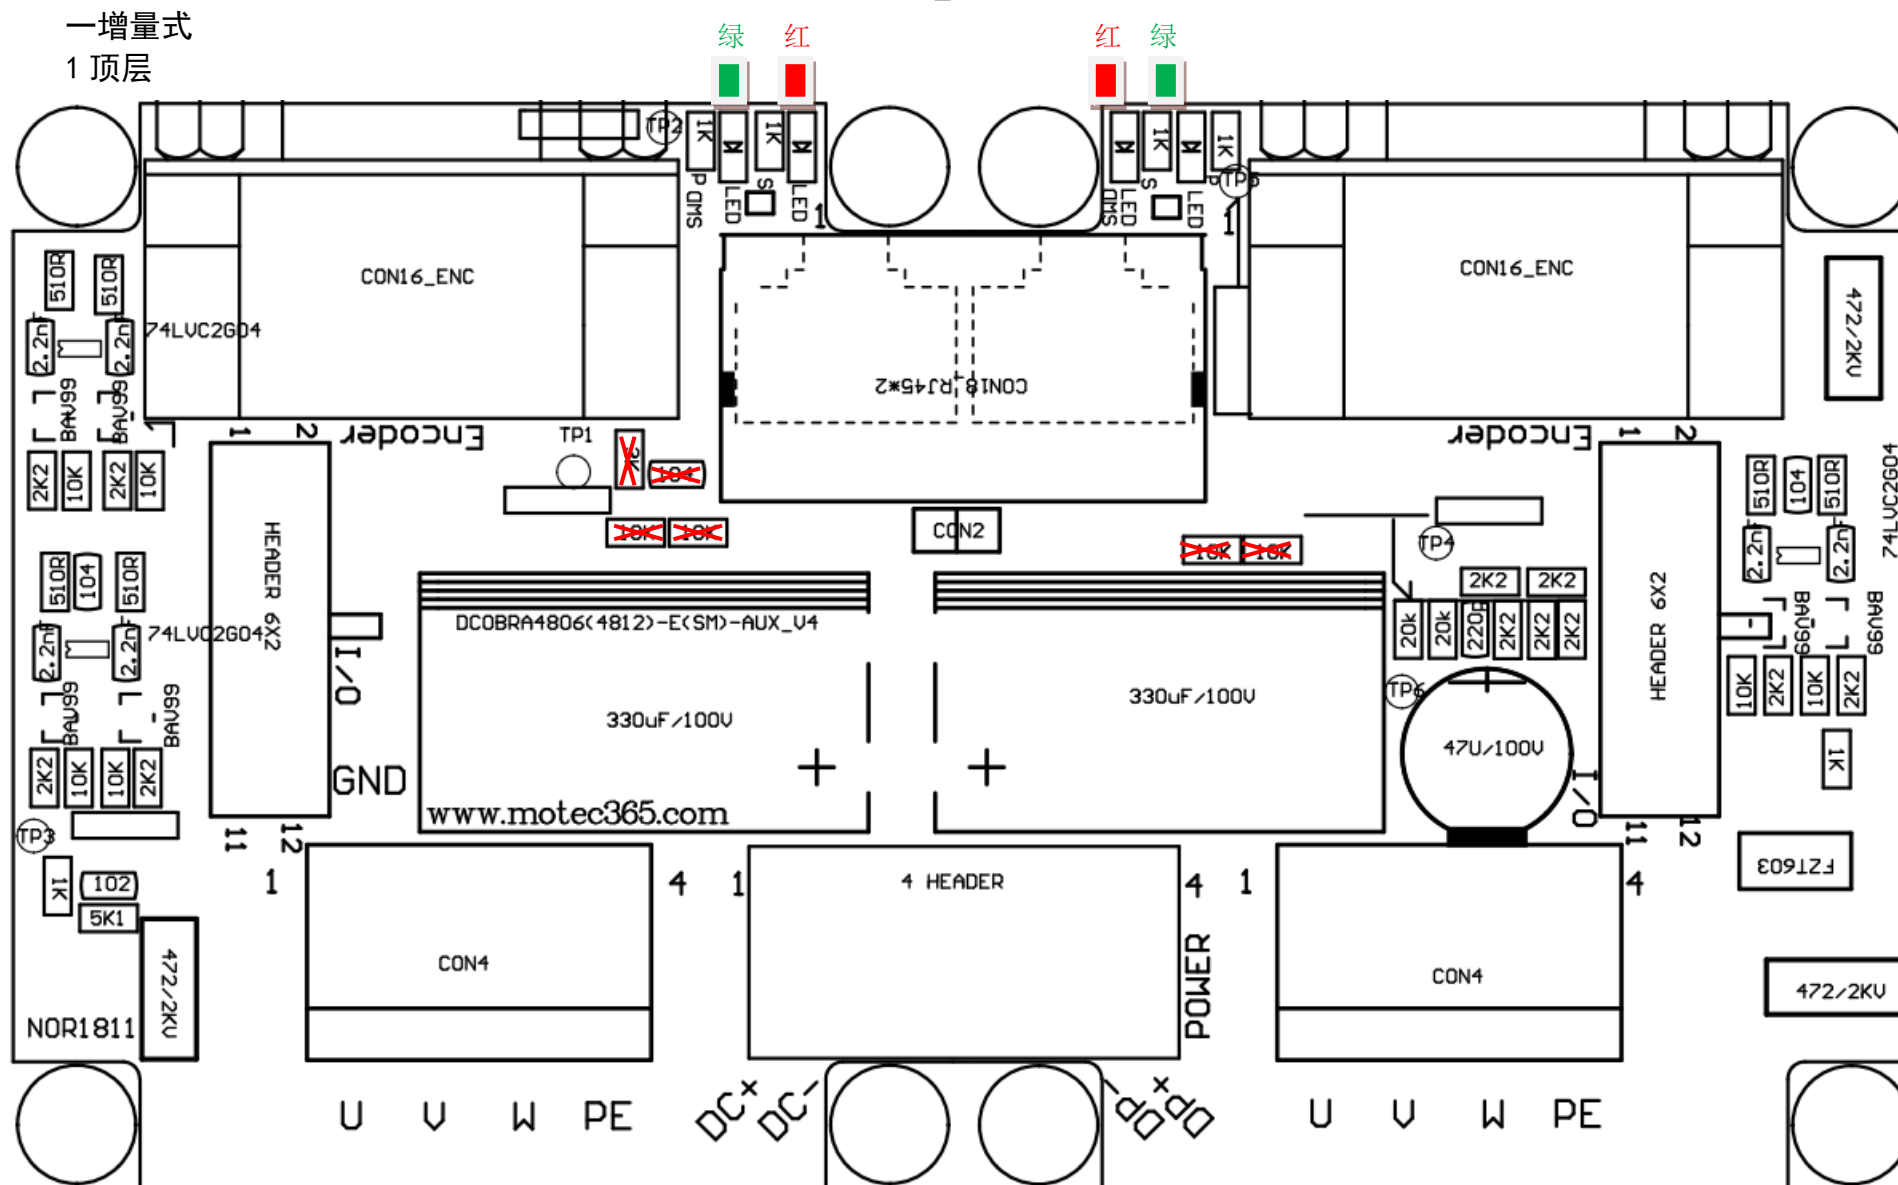

顶层位置不焊接元件 ~~X~~ :

- 1) R13 (10K), R13_2 (10K), R14 (10K), R14_2 (10K), R15 (3K),
- 2) C7(104)


2 底层

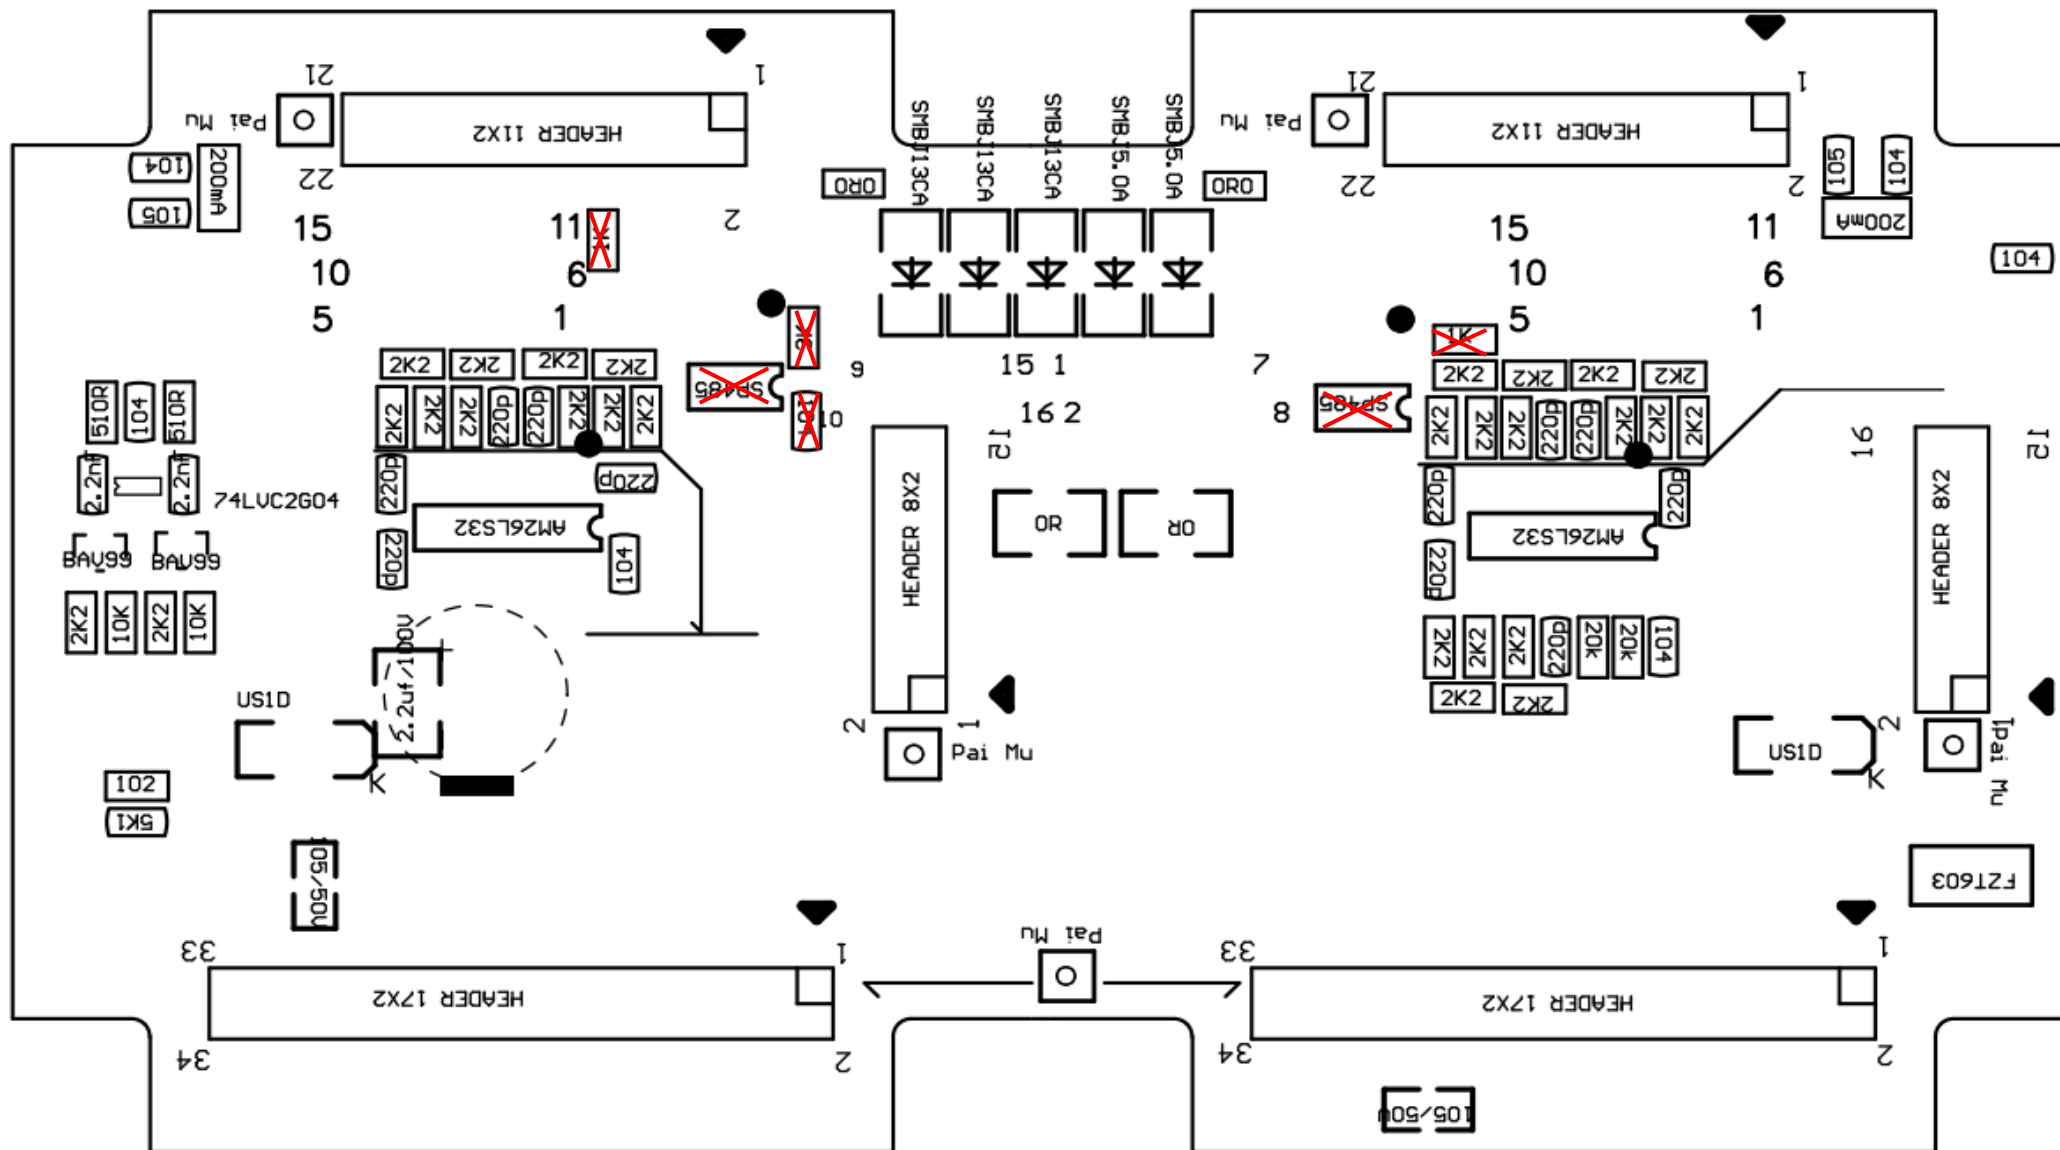

底层位置不焊接元件 ~~X~~ :

- 1) U3(SP485), U3_2(SP485)
- 2) R15_2 (3K) , R16 (1K) , R16_2 (1K)
- 3) C7_2(104)

2 底层

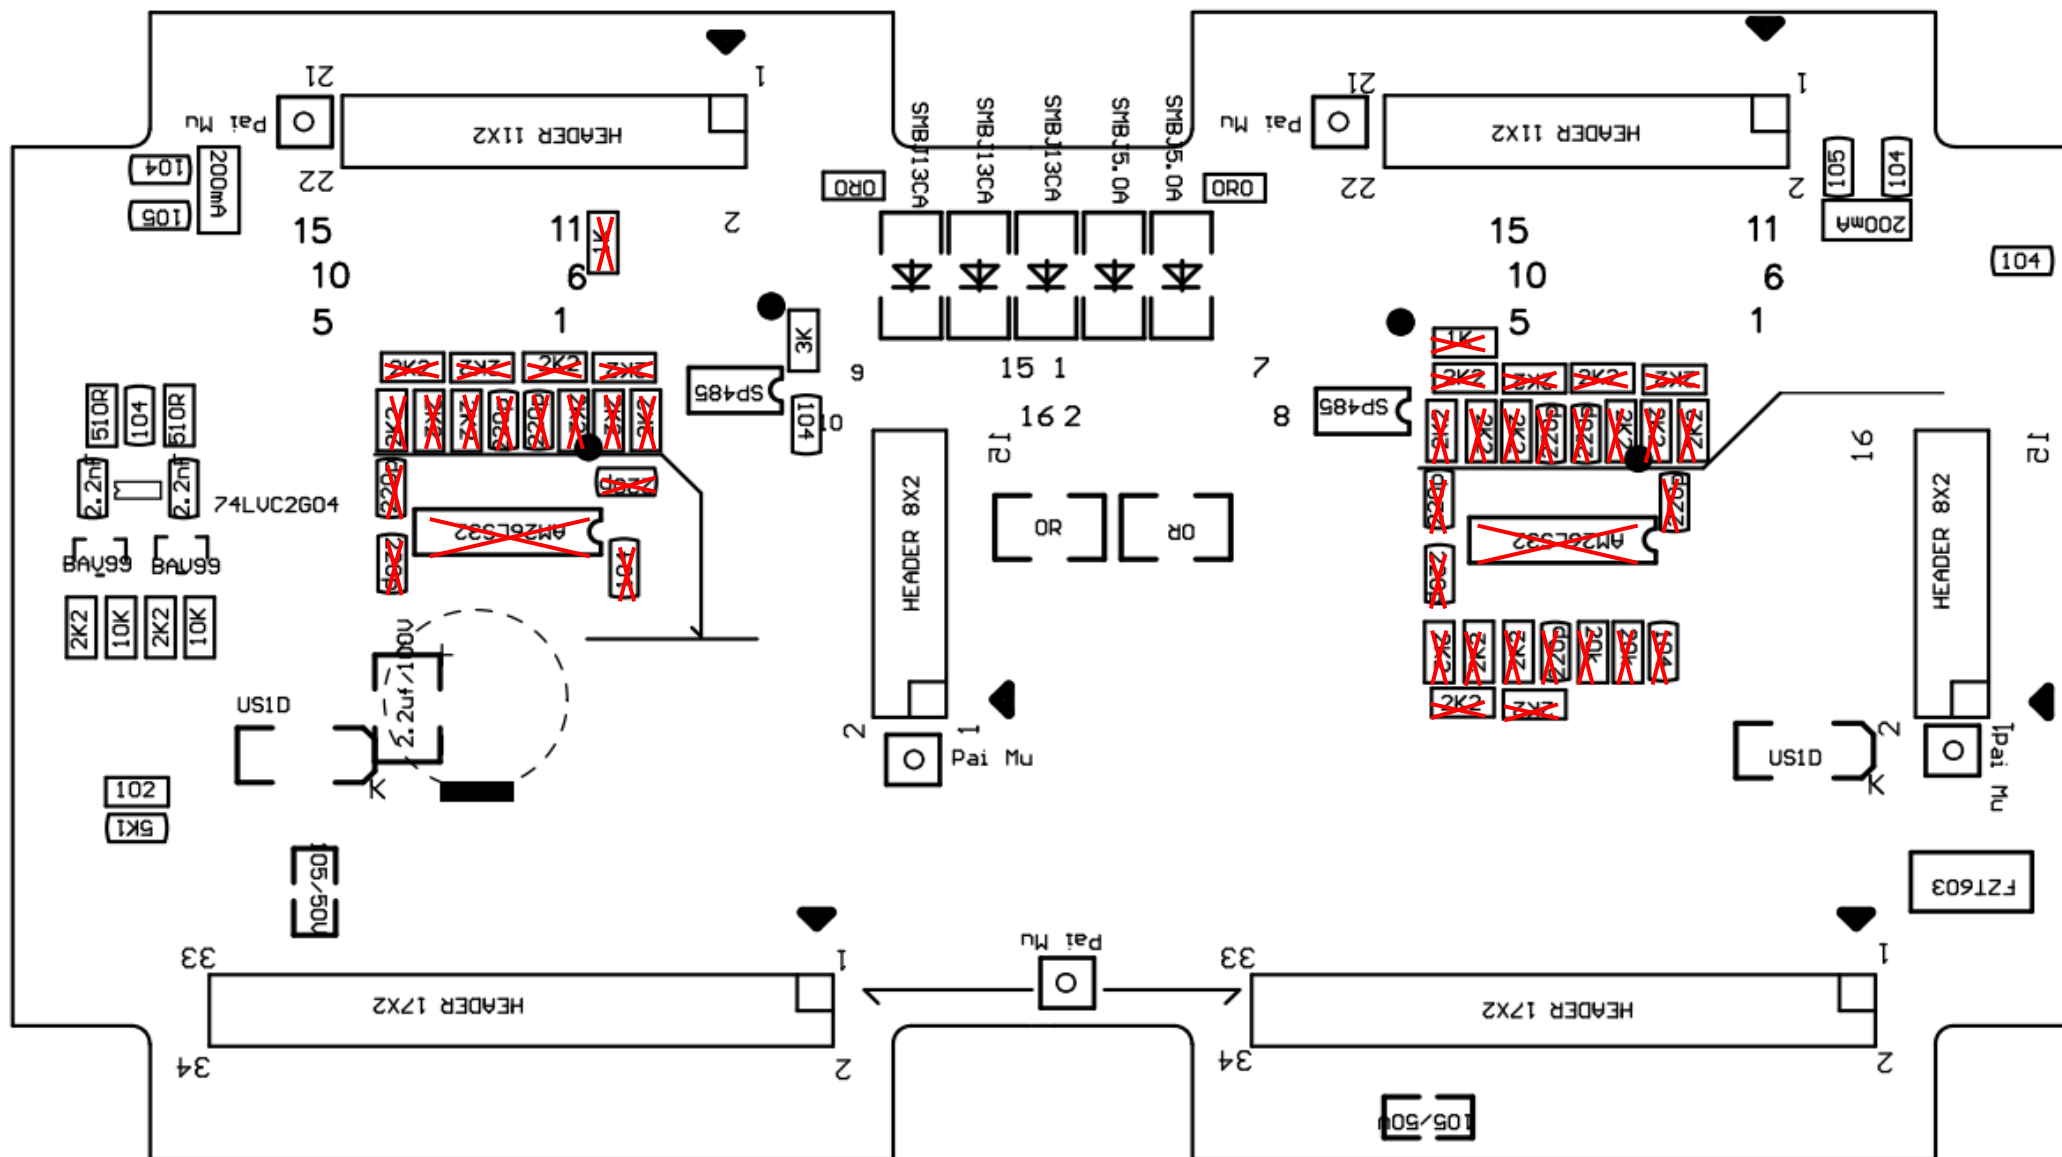

底层位置不焊接元件 ~~X~~ :

- 1) U401(AM26LS32), U401_2(AM26LS32)
- 2) R401~R415 (2K2) 15 个, R416 (20K) , R417 (20K) ;R405_2~R412_2 (2K2) 8 个, R414_2 (2K2), R415_2 (2K2);
- 3) C401~C406(220P)6 个, C407 (104) ; C402_2~C406_2(220P)5 个, C407_2 (104)